



Cover screws


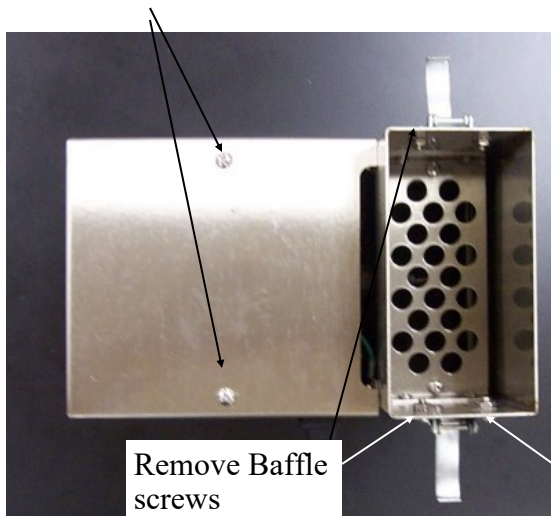


1. Remove the two screws securing the top of the cabinet.
2. Remove two of the four screws securing the baffle. Loosen the other two screws
3. Flip the baffle up and tighten one screw to hold it in place.

Loosen Baffle screws

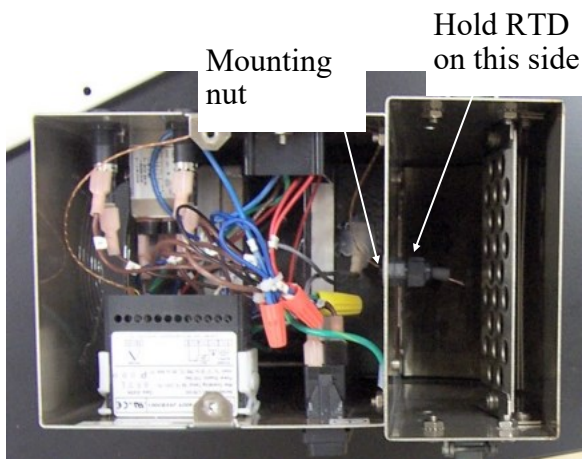

4. Remove the mounting nut of the RTD Assembly.
5. Squeeze the side tabs on the controller and push the controller out of the cabinet.

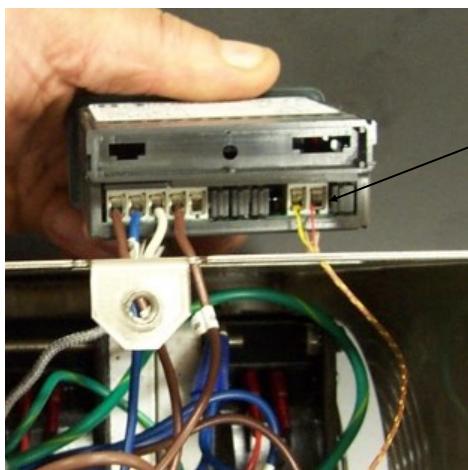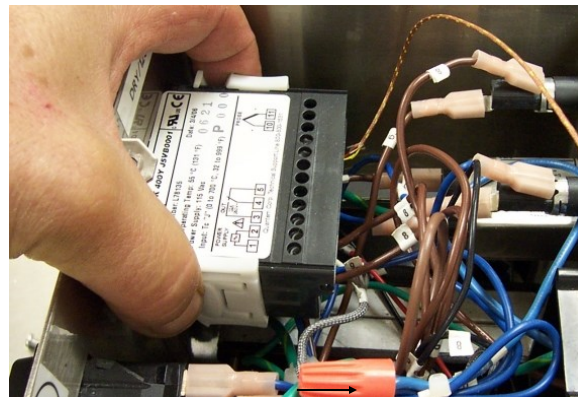

6. Remove the two RTD wires shown on the right. Pull the old RTD out of the cabinet.
7. Install the new RTD in the cabinet and re-connect the wires to the controller.
8. Install cabinet panel and baffle.
9. Turn the Dryer on and test the heat.